

MODEL S-1100

Hazardous Area Thermoelectric Generator



The S-1100 Thermoelectric Generator is IECEx, ATEX, ETL (US) (Class 1, Zone 1) and ETL (Canada) (Class 1, Div 1) hazardous area rated. With no moving parts, it is a reliable, low maintenance source of DC electrical power for any application where regular utilities are unavailable or unreliable.

KEY DESIGN FEATURES:

- ✘ Automatic Spark Ignition (SI)
- ✘ Automatic Fuel Shut-Off (SO)
- ✘ Fuel Filter
- ✘ Low Voltage Alarm Contacts (VSR)
- ✘ Output Voltage & Current 4–20 mA Signal
- ✘ Digital Volt & Amp Meter
- ✘ Flame Arrestors
- ✘ Reverse Current Protection

OPTIONAL FEATURES:

- ✘ Intake Air Filter
- ✘ Start-up Battery
- ✘ Stand



Power Specifications	Power Rating at 20°C:
	100 Watts @ 12 Volts
	100 Watts @ 24 Volts
Electrical	Output Adjustment Range:
	12 V 11.5–15.5 Volts
	24 V 23.0–31.0 Volts
Output:	Terminal block which accepts up to 6 AWG (up to 16mm ²) wire. Opening for three 1" NPT ports in electrical housing.
Fuel Requirements	Natural Gas:
	8.4m ³ /day (295 Sft ³ /day)
	1000 BTU/Sft ³ (37.7 MJ/Sm ³) gas
	max 115 mg/Sm ³ (~170 ppmw) H ₂ S
	max 120 mg/Sm ³ H ₂ O
	Propane:
	10.8 l/day (2.85 US gal/day)
	Max. Supply Pressure: 172 kPa (25 psi)
	Min. Supply Pressure: 103 kPa (15 psi)
	Fuel Connection: 1/4" MNPT
Construction	Materials:
	Enclosures: Cast Aluminum
	Cooling Type: Natural Convection
	Fuel System: Aluminum & Stainless Steel
	Cabinet: Stainless Steel


Environmental	Ambient Operating Temperature:
	Max. +60°C (140°F)
	Min. -40°C (-40°F)*
IECEx, ATEX and ETL (US) certifications apply down to -20°C*.	
	Operating Conditions:
	Unsheltered operation, certified for use in hazardous areas.
	Operating Altitude:
	Up to 3,000m
Certifications	IECEx, ATEX
	• II 2 G Ex db IIA T3 Gb
	• -20°C (-4°F) to +60°C (140°F)*
	ETL (Canada)
	• Class 1, Div 1 GR D T3
	• -40°C (-40°F) to +60°C (140°F)
	• CSA TIL R-10
	ETL (US)
	• Class 1, Zone 1 AEx db IIA T3 Gb
	• -20°C (-4°F) to +60°C (140°F)*

Note:

Specification data stated in this document is subject to change without notice. To verify these specifications are current, please contact your GPT sales representative. Data based on standard conditions: 15°C (59°F), one atm.

Please contact GPT for use in ambient temperatures below -10°C (14°F).

* -18°C to 40°C with battery option

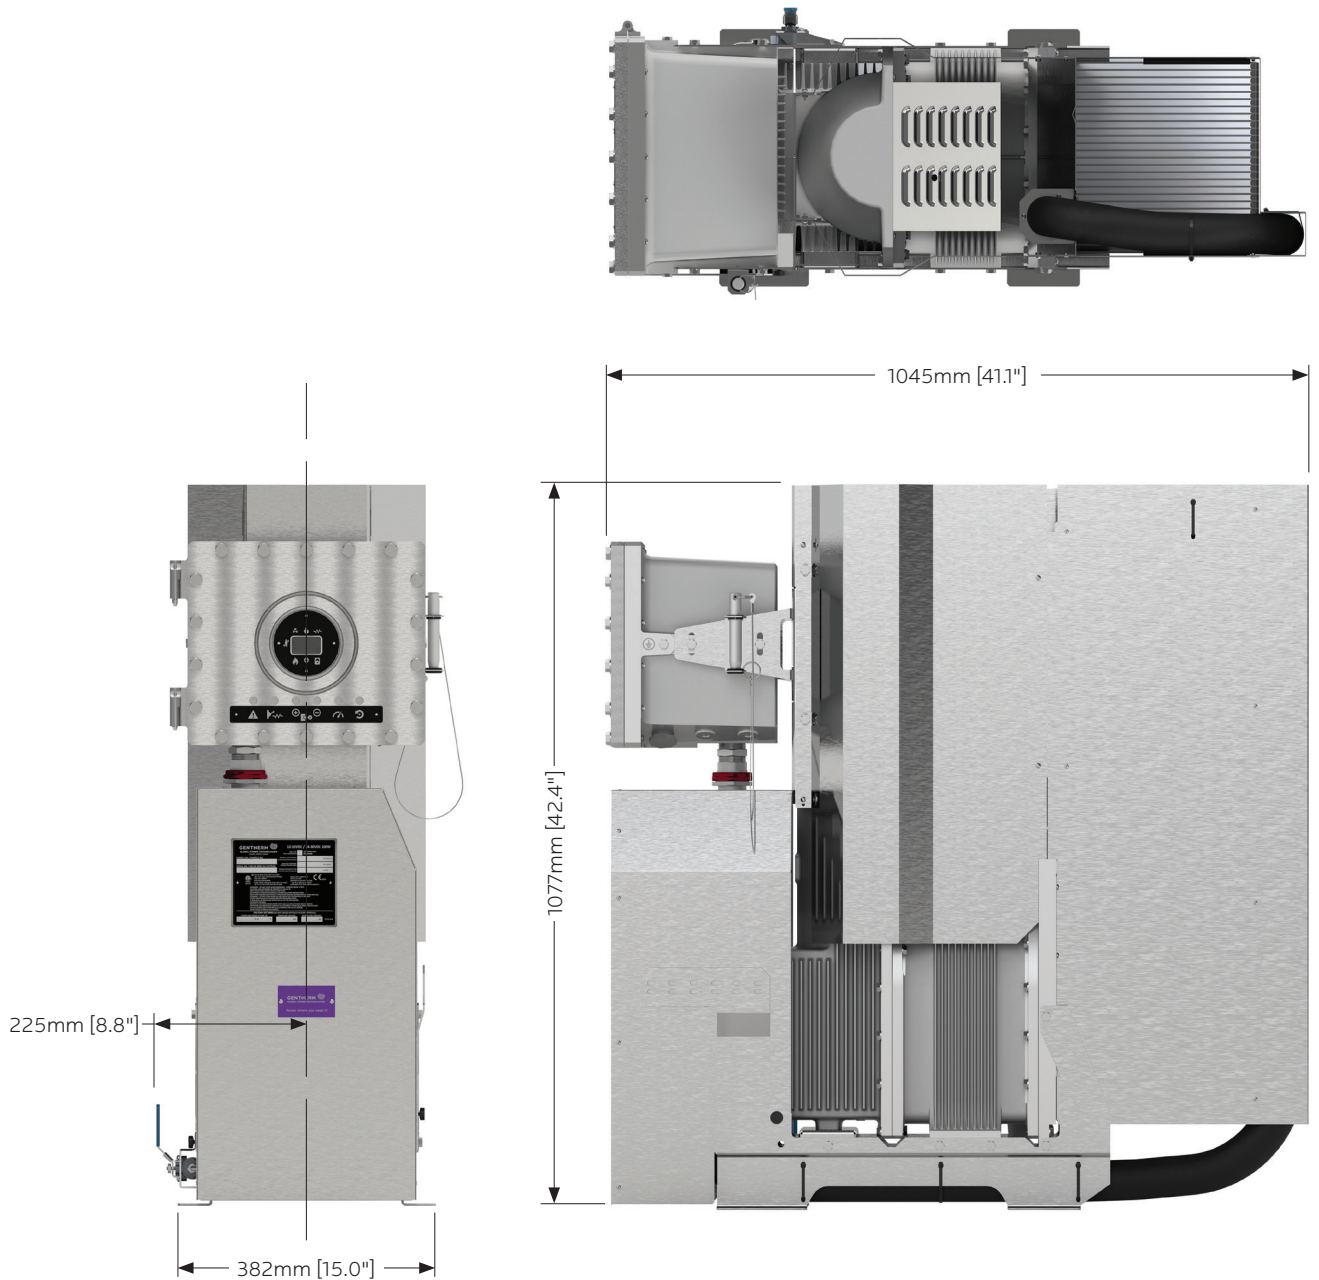

NOTES:

Generator Weight: 178 kg [393 lb] Model: S-1100

Global Power Technologies

p 403 236 5556
e gptsales@globalte.com
w globalte.com

16, 7875 – 57 Street SE
Calgary, Alberta, Canada T2C 5K7